


Insulated Ring Terminal


Description

Terminal made of electrolytic copper with tinned finish and PVC insulation in the crimping area between the conductor and the terminal. Ring-type terminal used for wire terminations.

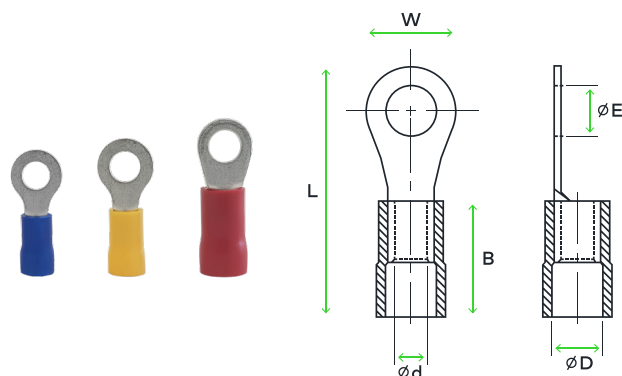

CODE	REFERENCE	SECTION (mm²)	ØE (mm)	ØD (mm)	Ød (mm)	W (mm)	B (mm)	L (mm)	COLOUR
7030101030	TOL-1.5-3A	0.25-1.50	3.2	4.0	1.7	5.5	10.4	17.3	Red
7030101032	TOL-1.5-3		3.7	4.0	1.7	5.5	10.4	17.3	
7030101037	TOL-1.5-3M		3.7	4.0	1.7	6.6	10.4	20.3	
7030101040	TOL-1.5-4M		4.3	4.0	1.7	6.6	10.4	20.3	
7030101050	TOL-1.5-5		5.3	4.0	1.7	8.0	10.4	21.8	
7030101060	TOL-1.5-6		6.4	4.0	1.7	11.6	10.4	27.5	
7030101080	TOL-1.5-8		8.4	4.0	1.7	11.6	10.4	27.5	
7030101100	TOL-1.5-10		10.5	4.0	1.7	13.6	10.4	31.8	
7030102030	TOL-2.5-3	1.50-2.50	3.7	4.6	2.3	8.5	10.4	22.3	Blue
7030102032	TOL-2.5-3A		3.2	4.6	2.3	8.5	10.4	22.3	
7030102037	TOL-2.5-3M		3.7	4.6	2.3	6.6	10.4	19.8	
7030102040	TOL-2.5-4		4.3	4.6	2.3	8.5	10.4	22.3	
7030102043	TOL-2.5-4M		4.3	4.6	2.3	6.6	10.4	19.8	
7030102050	TOL-2.5-5		5.3	4.6	2.3	9.5	10.4	22.3	
7030102060	TOL-2.5-6		6.4	4.6	2.3	12.0	10.4	27.3	
7030102080	TOL-2.5-8		8.4	4.6	2.3	12.0	10.4	27.3	
7030102100	TOL-2.5-10		10.5	4.6	2.3	13.6	10.4	30.8	
7030106030	TOL-6-3	4-6	3.7	6.6	3.5	9.5	13.5	26.5	Yellow
7030106040	TOL-6-4		4.3	6.6	3.5	9.5	13.5	26.5	
7030106050	TOL-6-5		5.3	6.6	3.5	9.5	13.5	26.5	
7030106060	TOL-6-6		6.4	6.6	3.5	12.0	13.5	29.2	
7030106080	TOL-6-8		8.4	6.6	3.5	15.0	13.5	34.5	
7030106100	TOL-6-10		10.5	6.6	3.5	15.0	13.5	34.5	
7030106120	TOL-6-12	10	13.2	6.6	3.5	18.2	13.5	35.0	Red
7030110040	TOL-10-4		4.3	8.3	4.5	10.0	17.5	30.0	
7030110050	TOL-10-5		5.3	8.3	4.5	10.0	17.5	30.0	
7030110060	TOL-10-6		6.4	8.3	4.5	11.0	17.5	31.5	
7030110080	TOL-10-8		8.4	8.3	4.5	14.0	17.5	36.0	
7030110100	TOL-10-10		10.5	8.3	4.5	18.0	17.5	39.5	

Insulated Ring Terminal

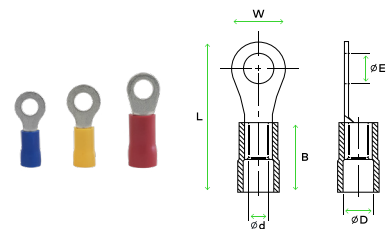

CODE	REFERENCE	SECTION (mm²)	ØE (mm)	ØD (mm)	Ød (mm)	W (mm)	B (mm)	L (mm)	COLOUR
7030116050	TOL-16-5	16	5.3	9.7	5.9	11.0	23.0	37.5	Blue
7030116060	TOL-16-6		6.4	9.7	5.9	11.0	23.0	37.5	
7030116080	TOL-16-8		8.4	9.7	5.9	14.0	23.0	43.0	
7030116100	TOL-16-10		10.5	9.7	5.9	18.0	23.0	45.0	
7030116120	TOL-16-12		13.0	9.7	5.9	18.0	23.0	45.0	