


Insulated Spade Terminal

Description

Terminal made of electrolytic copper with tinned finish and PVC insulation in the crimping area between the conductor and the terminal. Fork-type terminal used for wire terminations.

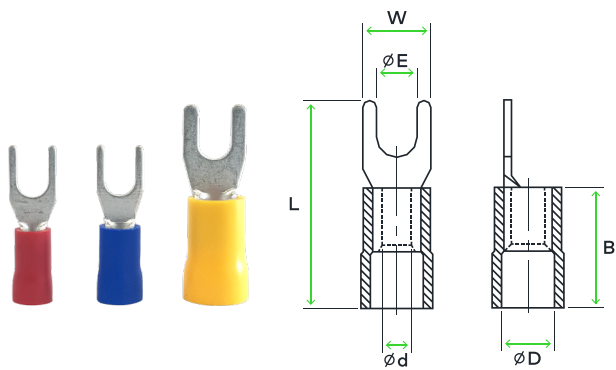

CODE	REFERENCE	SECTION (mm ²)	ØE (mm)	ØD (mm)	Ød (mm)	W (mm)	B (mm)	L (mm)	COLOUR
7030201530	TFO-1.5-3S	0.25-1.50	3.7	4.0	1.7	5.7	10.4	21.8	Red
7030201537	TFO-1.5-3W		3.7	4.0	1.7	6.2	10.4	21.8	
7030201532	TFO-1.5-3SA		3.2	4.0	1.7	5.7	10.4	21.8	
7030201540	TFO-1.5-4S		4.3	4.0	1.7	6.4	10.4	21.8	
7030201550	TFO-1.5-5		5.3	4.0	1.7	8.0	10.4	21.8	
7030201560	TFO-1.5-6		6.7	4.0	1.7	10.7	10.4	22.8	
7030202532	TFO-2.5-3SA	1.50-2.50	3.2	4.6	2.3	5.7	10.4	21.8	Blue
7030202537	TFO-2.5-3W		3.7	4.6	2.3	6.2	10.4	21.8	
7030202540	TFO-2.5-4S		4.3	4.6	2.3	6.4	10.4	21.8	
7030202550	TFO-2.5-5		5.3	4.6	2.3	8.0	10.4	21.8	
7030202560	TFO-2.5-6		6.7	4.6	2.3	10.7	10.4	24.8	
7030206030	TFO-6-3.5	4-6	3.7	6.6	3.5	8.2	13.6	26.5	Yellow
7030206040	TFO-6-4		4.3	6.6	3.5	8.2	13.6	26.5	
7030206050	TFO-6-5		5.3	6.6	3.5	9.0	13.6	26.5	
7030206060	TFO-6-6		6.4	6.6	3.5	12.0	13.6	31.2	
7030210050	TFO-10-5	10	5.3	8.3	4.5	9.0	17.5	32.0	Red
7030210060	TFO-10-6		6.7	8.3	4.5	12.0	17.5	32.5	
7030216050	TFO-16-5	16	5.3	9.7	5.9	12.0	23.0	40.5	Blue
7030216060	TFO-16-6		6.7	9.7	5.9	12.0	23.0	40.5	