


Insulated Female Fast-on Terminal

Description

Connector made of electrolytic copper with tinned finish and PVC insulation in the crimping area between the conductor and the terminal. It features an internal locking mechanism that enhances safety by reducing the risk of mechanical vibrations.

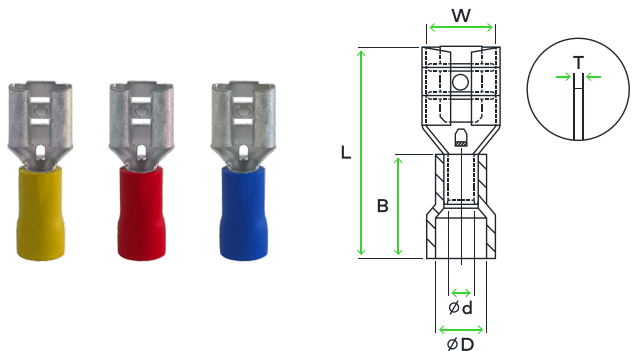

CODE	REFERENCE	SECTION (mm²)	W (mm)	L (mm)	T (mm)	B (mm)	Ød (mm)	ØD (mm)
7030815285	TFF-1.5-2.8-05	0.25-1.50	3.2	18.5	0.3	10.0	1.8	3.6
7030815288	TFF-1.5-2.8-08		3.2	18.5	0.3	10.0	1.8	3.6
7030815485	TFF-1.5-4.8-05		5.0	19.0	0.4	10.0	1.8	3.6
7030815488	TFF-1.5-4.8-08		5.0	19.0	0.4	10.0	1.8	3.6
7030815638	TFF-1.5-6.3-08		6.6	20.3	0.4	10.0	1.8	3.8
7030825285	TFF-2.5-2.8-05	1.50-2.50	3.2	18.5	0.3	10.0	2.4	4.2
7030825288	TFF-2.5-2.8-08		3.2	18.5	0.3	10.0	2.4	4.2
7030825485	TFF-2.5-4.8-05		5.0	19.0	0.4	10.0	2.4	4.2
7030825488	TFF-2.5-4.8-08		5.0	19.0	0.4	10.0	2.4	4.2
7030825638	TFF-2.5-6.3-08		6.6	20.3	0.4	10.0	2.4	4.2
7030860638	TFF-6-6.3-08	4-6	6.6	23.3	0.4	13.0	3.5	5.4