


Insulated Male Fast-on Terminal

Description

Connector made of electrolytic copper with tinned finish and PVC insulation in the crimping area between the conductor and the terminal.

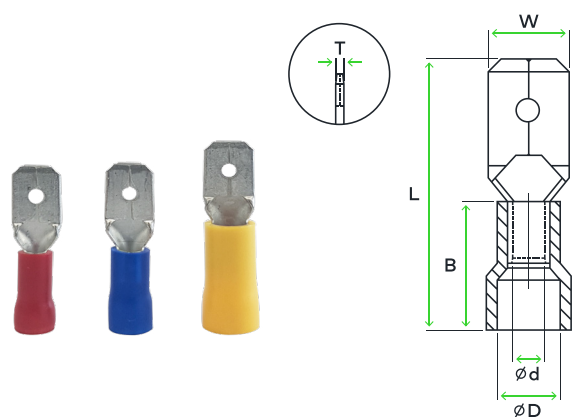

CODE	REFERENCE	SECTION (mm²)	W (mm)	L (mm)	T (mm)	B (mm)	Ød (mm)	ØD (mm)
7030915285	TFM-1.5-2.8-05	0.50-1.50	2.8	18.5	0.5	10.0	1.8	3.6
7030915288	TFM-1.5-2.8-08		2.8	18.5	0.8	10.0	1.8	3.6
7030915485	TFM-1.5-4.8-05		4.5	19.0	0.5	10.0	1.8	3.6
7030915488	TFM-1.5-4.8-08		4.5	19.0	0.8	10.0	1.8	3.6
7030915638	TFM-1.5-6.3-08		6.3	21.1	0.8	10.0	1.8	3.8
7030925285	TFM-2.5-2.8-05	1.50-2.50	2.8	18.5	0.5	10.0	2.4	4.2
7030925288	TFM-2.5-2.8-08		2.8	18.5	0.8	10.0	2.4	4.2
7030925485	TFM-2.5-4.8-05		4.5	19.0	0.5	10.0	2.4	4.2
7030925488	TFM-2.5-4.8-08		4.5	19.0	0.8	10.0	2.4	4.2
7030925638	TFM-2.5-6.3-08		6.3	21.1	0.8	10.0	2.3	4.2
7030960638	TFM-6-6.3-08	4-6	6.3	24.0	0.8	13.0	3.5	5.4