


Insulated Male-Female Fast-on Terminal

Description

Connector made of electrolytic copper with tinned finish and PVC insulation in the crimping area between the conductor and the terminal. It features an internal locking mechanism that enhances safety by reducing the risk of mechanical vibrations.

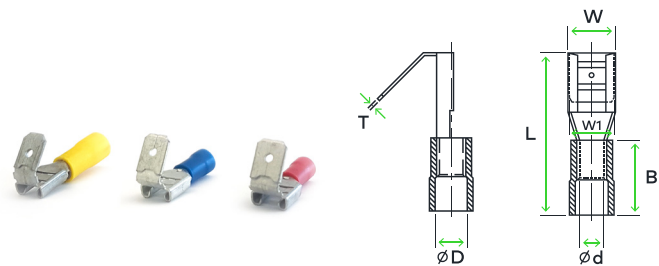

CODE	REFERENCE	SECTION (mm²)	W (mm)	W1 (mm)	L (mm)	B (mm)	T (mm)	Ød (mm)	ØD (mm)	COLOUR
7031001563	TFMF-1.5-6.3	0.25-1.50	6.8	6.3	22.5	10.0	0.8	1.8	3.9	Red
7031002563	TFMF-2.5-6.3	1.50-2.50	6.8	6.3	22.5	10.0	0.8	2.3	4.2	Blue
7031006063	TFMF-6-6.3	4-6	6.8	6.3	24.0	13.5	0.8	3.5	5.5	Yellow