


Polypropylene Terminal Blocks

Description

Polypropylene terminal blocks with operating temperature up to 85 °C. Semi-rigid, self-extinguishing flame-retardant material with raised screws for easy cable insertion. Easily separable, can be connected to a connector or grouped in sets of two or more units. Sections available from 4 to 25 mm² in white and from 4 to 6 mm² in black.

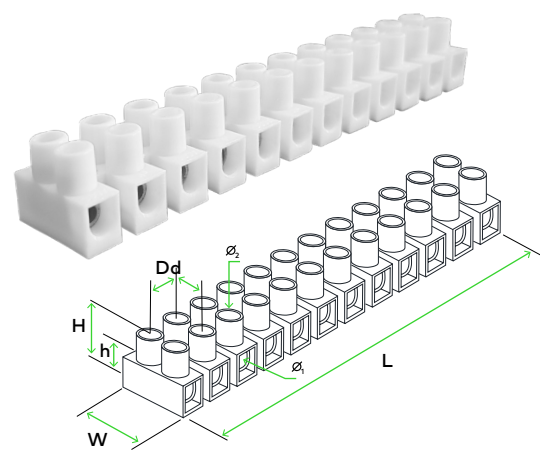

CODE	REFERENCE	CABLE SECTION (mm²)	NOMINAL CURRENT (A)	NOMINAL VOLTAGE (V)	L (mm)	W (mm)	Ø ₁ (mm)	Ø ₂ (mm)	D (mm)	d (mm)	H (mm)	h (mm)
7060101004	BJO-4	2.5-4	3 - 24	380	93	16.8	2.8	2.3	7.8	6	13.6	7.6
7060101006	BJO-6	4-6	5 - 32	380	114	18.8	3.3	2.6	10	8	15	8.8
7060101010	BJO-10	6-10	10 - 57	400	125	20.7	4.3	2.8	11	9	16.2	9.6
7060101016	BJO-16	16	30 - 76	400	165	25.5	5.5	3.0	14	11	19.8	11.2
7060101025	BJO-25	25	60 - 101	400	187	31.2	6.5	3.8	16.5	13	25.5	14.8
7060102004	BJO-4 Black	2.5-4	3 - 24	380	93	16.8	2.8	2.3	7.8	6	13.6	7.6
7060102006	BJO-6 Black	2-6	5 - 32	380	114	18.8	3.3	2.6	10	8	15	8.8