

Cable Tie for Food Industry

Description

Arvi cable ties are manufactured to the highest quality standards and undergo rigorous testing. This range is ideal for the food industry due to its metal detectability. However, they are also suitable for any application where this feature is required.



Available Certifications




Features




Product Properties

PROPERTY	VALUE
Material	Polyamide 6.6
Flammability Rating	UL94 V2
Moisture Absorption	2.7 % – 2.8 % (23 °C, 50 % RH)
Installation Temperature	–10 °C to +85 °C
Operating Temperature	–40 °C to +85 °C
Max Short-Term Temperature	+110 °C
Color	Blue

Technical Drawing A

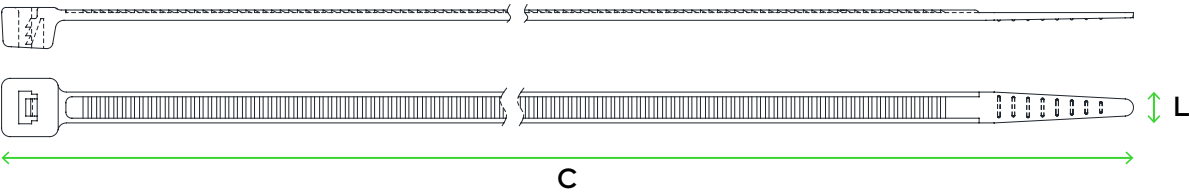

Technical Drawing B

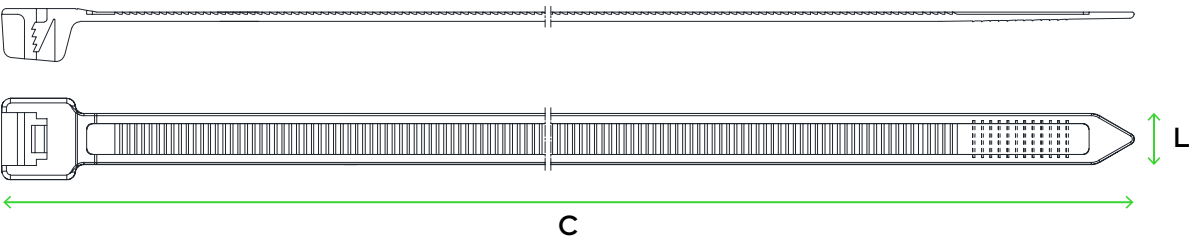

Cable Tie for Food Industry



Product Specifications

CODE	REFERENCE	L WIDTH (mm)	C LENGTH (mm)	Min. Usable Ø (mm)	Max. Usable Ø (mm)	TENSILE STRENGTH (N)	TYPE
7020242010	PV-025-100-MD-A	2,5	100,0	3,0	20,5	80	A
7020243015	PV-036-150-MD-A	3,6	150,0	3,5	36,0	180	A
7020243020	PV-036-200-MD-A	3,6	200,0	3,5	52,5	180	A
7020244020	PV-048-200-MD-A	4,8	200,0	3,5	49,5	230	A
7020244030	PV-048-300-MD-A	4,8	300,0	3,5	81,0	230	A
7020324037	PV-048-370-AT-B	4,8	370,0	3,5	106,7	230	A
7020327037	PV-076-370-AT-B	7,6	370,0	8,5	108,0	540	B

Product Packaging



Logistics Information

CODE	REFERENCE	EAN CODE	BAG			BOX		
			QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)	QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)
7020242010	PV-025-100-MD-A	5608445030825	100	9,5x19,0	0,03	50000	55,0x40,0x26,0	17,66
7020243015	PV-036-150-MD-A	5608445030832	100	11,5x24,0	0,08	20000	55,0x40,0x22,5	16,44
7020243020	PV-036-200-MD-A	5608445030849	100	11,5x31,0	0,10	10000	55,0x40,0x15,0	11,08
7020244020	PV-048-200-MD-A	5608445030856	100	14,0x31,0	0,14	10000	55,0x40,0x21,0	14,07
7020244030	PV-048-300-MD-A	5608445030863	100	14,0x41,0	0,20	5000	55,0x40,0x15,0	11,44
7020324037	PV-048-370-AT-B	5608445030870	100	14,0x49,0	0,26	5000	55,0x40,0x19,0	14,47
7020327037	PV-076-370-AT-B	5608445030887	100	16,0x51,0	0,52	2500	55,0x40,0x15,0	13,90