

High Temperature Resistant Cable Tie


Description

Arvi cable ties are manufactured to the highest quality and thoroughly tested.
This range is ideal for applications where high temperature resistance is a requirement.

Available Certifications




Features




Product Properties

PROPERTY	VALUE
Material	Polyamide 4,6
Flammability Rating	UL94 V2
Moisture Absorption	2.7 % – 2.8 % (23 °C, 50 % RH)
Minimum Installation Temp.	-10 °C
Operating Temperature	-40 °C to +130 °C
Color	Beige

Technical Drawings A

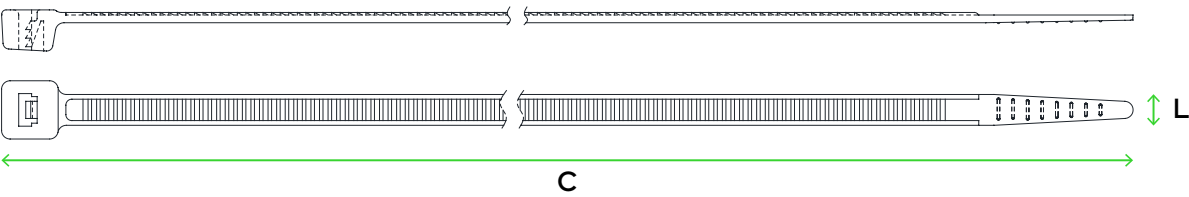

Technical Drawings B

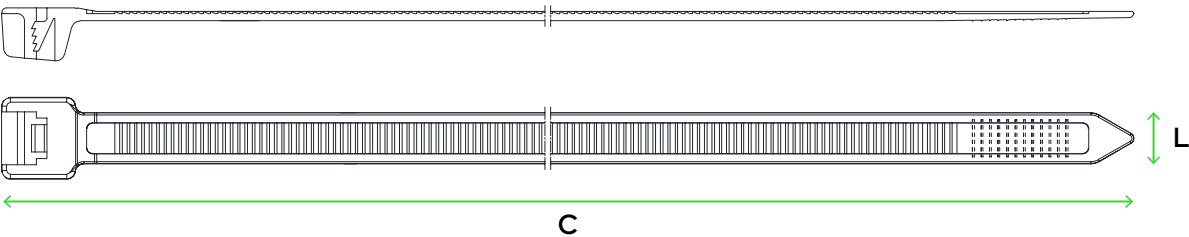

High Temperature Resistant Cable Tie



Product Specifications

CODE	REFERENCE	L WIDTH (mm)	C LENGTH (mm)	Min. Usable Ø (mm)	Max. Usable Ø (mm)	TENSILE STRENGTH (N)	TYPE
7020322010	PV-025-100-AT-B	2,5	100,0	3,0	20,5	80	A
7020323015	PV-036-150-AT-B	3,6	150,0	3,5	36,0	180	A
7020323020	PV-036-200-AT-B	3,6	200,0	3,5	52,5	180	A
7020324020	PV-048-200-AT-B	4,8	200,0	3,5	49,5	230	A
7020324030	PV-048-300-AT-B	4,8	300,0	3,5	81,0	230	A
7020324037	PV-048-370-AT-B	4,8	370,0	3,5	106,7	230	A
7020327037	PV-076-370-AT-B	7,6	370,0	8,5	108,0	540	B

Product Packaging



Logistics Information

CODE	REFERENCE	EAN CODE	BAG			BOX		
			QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)	QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)
7020322010	PV-025-100-AT-B	5608445030894	100	9,5x19,0	0,03	50000	55,0x40,0x24,0	14,90
7020323015	PV-036-150-AT-B	5608445030900	100	11,5x24,0	0,07	20000	55,0x40,0x21,0	14,80
7020323020	PV-036-200-AT-B	5608445030917	100	11,5x31,0	0,09	20000	55,0x40,0x24,0	19,50
7020324020	PV-048-200-AT-B	5608445030924	100	14,0x31,0	0,12	10000	55,0x40,0x19,0	13,50
7020324030	PV-048-300-AT-B	5608445030931	100	14,0x39,0	0,19	10000	55,0x40,0x24,0	20,30
7020324037	PV-048-370-AT-B	5608445030948	100	14,0x49,0	0,25	5000	55,0x40,0x17,0	13,21
7020327037	PV-076-370-AT-B	5608445030955	100	16,0x51,0	0,45	5000	55,0x40,0x26,0	23,76