

Reusable Cable Tie

Description


Arvi cable ties are manufactured to the highest quality standards and tested to the limit. This product is reusable thanks to its integrated release mechanism.



Available Certifications




Features




Product Properties

PROPERTY	VALUE
Material	Polyamide 6.6
Flammability Rating	UL94 V2
Moisture Absorption	2.7 % – 2.8 % (23 °C, 50 % RH)
Min. Installation Temperature	–10 °C
Operating Temperature	–40 °C to +85 °C
Max. Short-Term Temperature	+110 °C
Color	Black
UV Resistance	Yes

Technical Drawing A

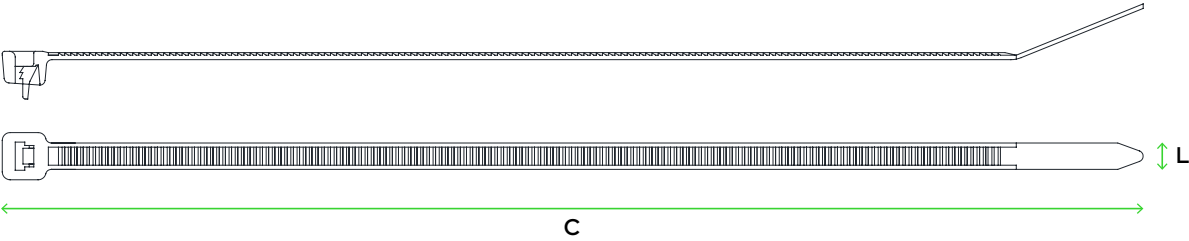

Technical Drawing B

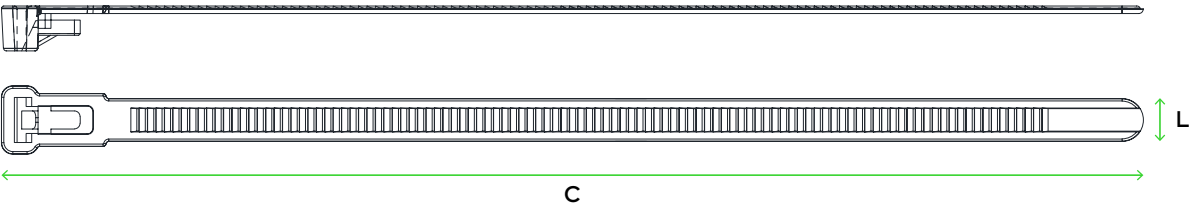

Reusable Cable Tie



Product Specifications

CODE	REFERENCE	L WIDTH (mm)	C LENGTH (mm)	MIN. USABLE Ø (mm)	MAX. USABLE Ø (mm)	TENSILE STRENGTH (N)	TYPE
7020522010	PV-025-100-R-P	2,5	100,0	3,0	22,60	80	A
7020524016	PV-048-160-R-P	4,8	160,0	3,5	41,90	180	A
7020524020	PV-048-200-R-P	4,8	200,0	3,5	54,80	230	A
7020524030	PV-048-305-R-P	4,8	305,0	3,5	88,10	230	A
7020524038	PV-048-380-R-P	4,8	380,0	3,5	111,00	230	A
7020527015	PV-076-150-R-P	7,6	150,0	10,0	40,3	230	B
7020527020	PV-076-200-R-P	7,6	200,0	10,0	55,6	230	B
7020527025	PV-076-250-R-P	7,6	250,0	10,0	66,7	230	B
7020527030	PV-076-300-R-P	7,6	300,0	10,0	82,0	230	B
7020527037	PV-076-370-R-P	7,6	370,0	10,0	104,3	230	B

Product Packaging



Reusable Cable Tie



Logistics Information

CODE	REFERENCE	EAN CODE	BAG			BOX		
			QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)	QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)
7020522010	PV-025-100-R-P	5608445031044	100	11,5x21,0	0,05	20000	55,0x40,0x17,0	9,00
7020524016	PV-048-160-R-P	5608445031051	100	14,0x29,0	0,10	10000	55,0x40,0x21,0	11,00
7020524020	PV-048-200-R-P	5608445031068	100	14,0x31,0	0,13	10000	55,0x40,0x22,5	14,00
7020524030	PV-048-305-R-P	5608445031075	100	14,0x41,0	0,19	10000	55,0x40,0x28,0	20,00
7020524038	PV-048-380-R-P	5608445031082	100	14,0x49,0	0,23	5000	55,0x40,0x22,5	12,50
7020527015	PV-076-150-R-P	5608445031099	100	16,0x28,0	0,17	10000	55,0x40,0x32,0	18,00
7020527020	PV-076-200-R-P	5608445031105	100	16,0x35,0	0,23	5000	55,0x40,0x19,0	12,50
7020527025	PV-076-250-R-P	5608445031112	100	16,0x38,0	0,26	5000	55,0x40,0x21,0	14,00
7020527030	PV-076-300-R-P	5608445031129	100	16,0x44,0	0,33	5000	55,0x40,0x26,0	18,00
7020527037	PV-076-370-R-P	5608445031136	100	16,0x51,0	0,39	5000	55,0x40,0x32,0	21,00