

Marker Cable Tie


Description

Arvi cable ties are manufactured to the highest quality and tested to the limit. This product includes an integrated marker area built into the tie body.

Available Certifications




Features




Product Properties

PROPERTY	VALUE
Material	Polyamide 6.6
Flammability Rating	UL94 V2
Moisture Absorption	2.7 % – 2.8 % (23 °C, 50 % RH)
Min. Installation Temperature	-10 °C
Operating Temperature	-40 °C to +85 °C
Max. Short-Term Temperature	+110 °C
Color	Natural


Technical Drawing A

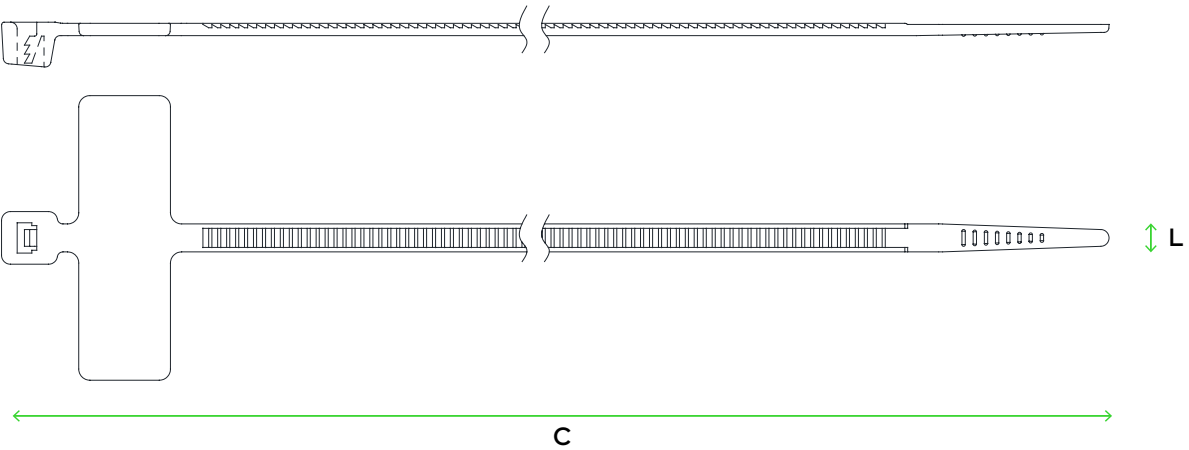


Marker Cable Tie

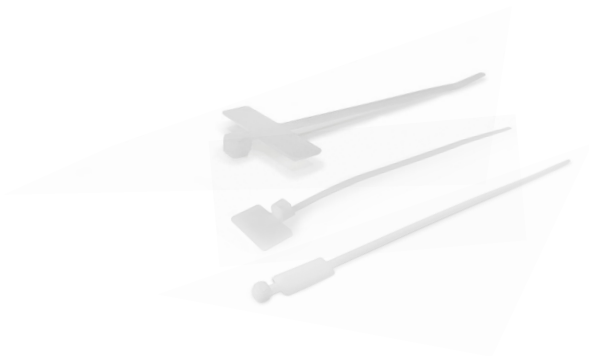

Technical Drawing B

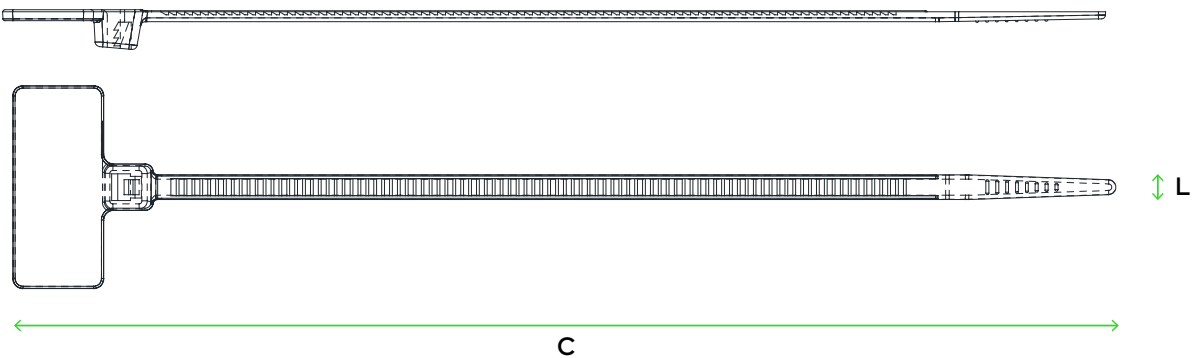

Technical Drawing C

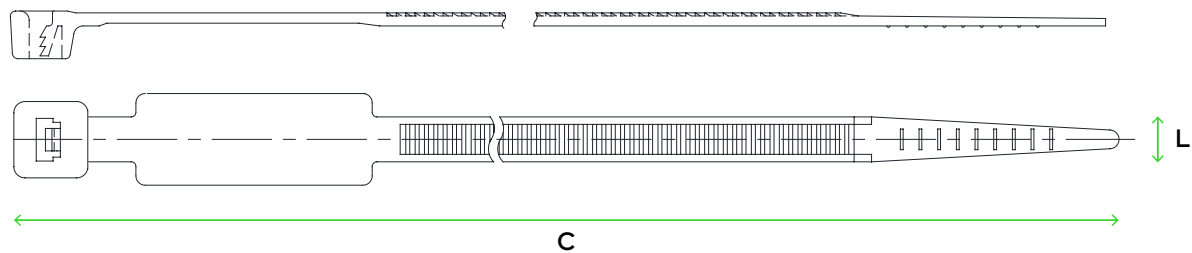

Product Specifications

CODE	REFERENCE	L WIDTH (MM)	C LENGTH (mm)	MIN. USABLE Ø (mm)	MAX. USABLE Ø (mm)	TENSILE STRENGTH (N)	MARKING TYPE	MARKING AREA (mm)	TYPE
7020612010	PV-025-100-E-N	2,5	100,0	3,5	22,0	80	Horizontal	7,7x24,5	A
7020612011	PV-025-110-E-N	2,5	110,0	3,5	22,6	80	Flag	9,0x20,0	B
7020612020	PV-025-200-E-N	2,5	200,0	3,5	53,9	80	Horizontal	7,7x24,5	A
7020614030	PV-048-300-E-N	4,8	300,0	3,5	84,4	230	Vertical	12,9x20,0	C

Marker Cable Tie

Product Packaging



Logistics Information

CODE	REFERENCE	EAN CODE	BAG			BOX		
			QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)	QUANTITY (un)	DIMENSIONS (cm)	WEIGHT (kg)
7020612010	PV-025-100-E-N	5608445031143	100	11,5x24,0	0,05	25000	55,0x40,0x24,0	13,50
7020612011	PV-025-110-E-N	5608445031150	100	11,5x24,0	0,05	25000	55,0x40,0x24,0	14,00
7020612020	PV-025-200-E-N	5608445031167	100	11,5x33,0	0,08	10000	55,0x40,0x15,0	9,00
7020614030	PV-048-300-E-N	5608445031174	100	16x44,0	0,23	5000	55,0x40,0x15,0	12,50