

Beaded Cable Tie


Description

Arvi cable ties are manufactured to the highest quality and tested to the limit.
This type of tie is ideal for packaging applications, where it can be opened and reused.

Available Certifications




Features




Product Properties

PROPERTY	VALUE
Material	Polyamide 6.6
Flammability Rating	UL94 V2
Moisture Absorption	2.7 % – 2.8 % (23 °C, 50 % RH)
Minimum Installation Temperature	-10 °C
Operating Temperature	-40 °C to +85 °C
Max. Short-Term Temperature	+110 °C
Color	Natural

Technical Drawing A

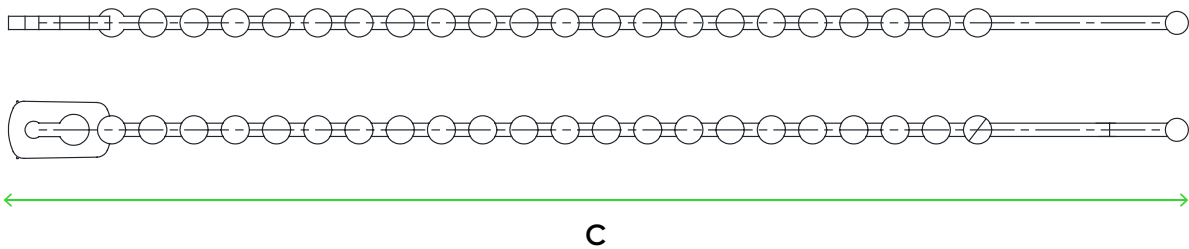

Technical Drawing B

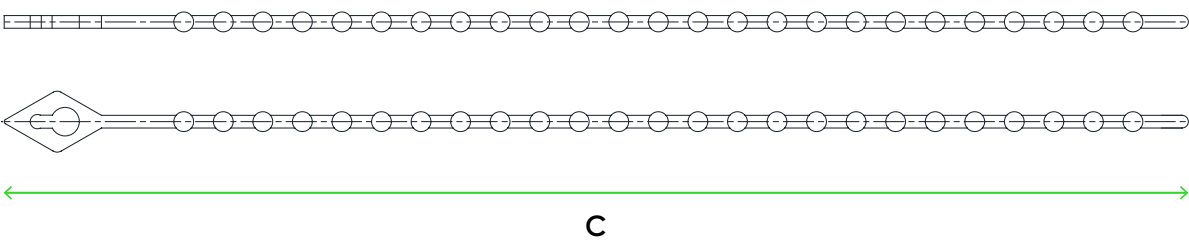

Beaded Cable Tie



Product Specifications

CODE	REFERENCE	C LENGTH (mm)	MAX USABLE Ø (mm)	TYPE
7020710010	PV-000-100-B-N	100,0	25,0	A
7020710015	PV-000-150-B-N	150,0	36,0	B
7020710020	PV-000-200-B-N	200,0	51,9	B

Product Packaging



Logistics Information

CODE	REFERENCE	EAN CODE	BAG			BOX		
			QUANTITY (pcs)	DIMENSIONS (cm)	WEIGHT (kg)	QUANTITY (pcs)	DIMENSIONS (mm)	WEIGHT (kg)
7020710010	PV-000-100-B-N	5608445031181	100	9,5x19,0	0,03	40000	55,0x40,0x24,0	14,00
7020710015	PV-000-150-B-N	5608445031198	100	9,5x25,0	0,06	20000	55,0x40,0x21,0	13,00
7020710020	PV-000-200-B-N	5608445031204	100	9,5x31,0	0,07	20000	55,0x40,0x24,0	14,00